



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
05.11.2003 Bulletin 2003/45

(51) Int Cl.7: **H04Q 7/32, H04L 12/56**

(43) Date of publication A2:
02.10.2002 Bulletin 2002/40

(21) Application number: **02252170.2**

(22) Date of filing: **26.03.2002**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Flitton, Michael Philip**
Bristol BS1 4ND (GB)
• **Lewis, Jonathan David**
Bristol BS1 4ND (GB)

(30) Priority: **30.03.2001 GB 0108025**


(74) Representative: **Midgley, Jonathan Lee**
Marks & Clerk
57-60 Lincoln's Inn Fields
GB-London WC2A 3LS (GB)

(71) Applicant: **Kabushiki Kaisha Toshiba**
Tokyo 105-8001 (JP)

(54) **Mode monitoring and identification through distributed radio**

(57) Independent radio communication devices can share network information directly with each other in the local area using an independent wireless link. This network information encompasses synchronisation information, interference, network configuration, neighbour

cell list, paging requests, etc., and can be relevant to multiple networks, frequency carriers and/or air interface modes. Sharing the information reduces the processing requirement, the power consumption, and the bandwidth consumption of devices.

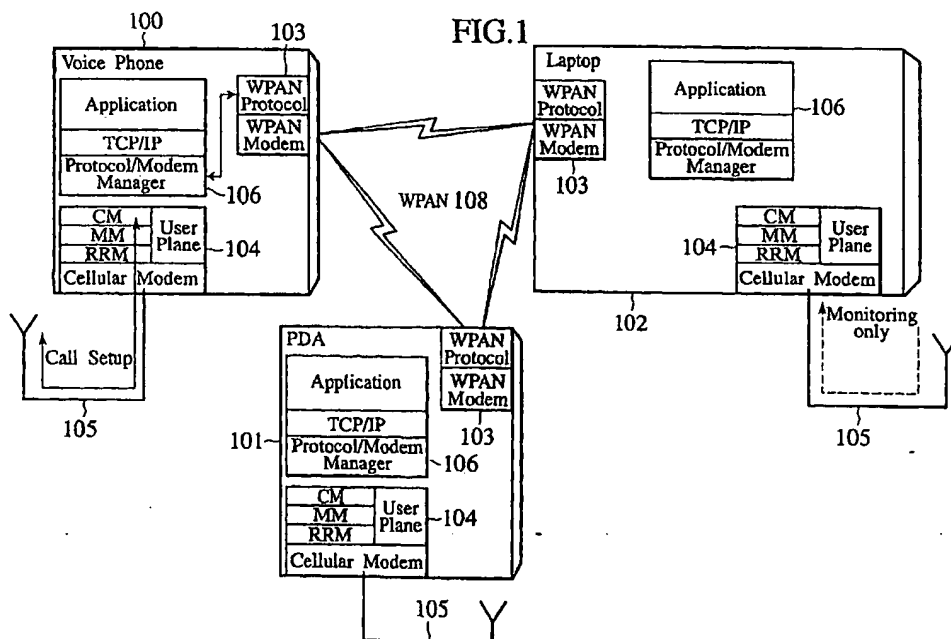



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 2170

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 98 57444 A (ERICSSON GE MOBILE INC) 17 December 1998 (1998-12-17)	1-6,8,9, 14-23	H04Q7/32 H04L12/56
Y	* abstract * * page 3, line 25 - line 33 * * page 4, line 22 - page 5, line 21 * * page 6, line 4 - line 15 * * page 7, line 23 - line 29 * * page 8, line 7 - page 9, line 19 * * figure 2 *	7	
Y	---		
Y	WO 98 39936 A (TOMLINSON KERRY JOHN ;SALBU RES AND DEV PTY LTD (ZA); LARSEN JAMES) 11 September 1998 (1998-09-11)	7	
A	* abstract *	1,4,5,9, 15,17-21	
	* page 3, line 6 - page 4, line 5 * * page 5, line 11 - line 20 * * page 17, line 24 - page 18, line 16 * * page 19, line 1 - line 12 * * page 21, line 11 - line 13 *		

X	HAARTSEN J: "BLUETOOTH - THE UNIVERSAL RADIO INTERFACE FOR AD HOC, WIRELESS CONNECTIVITY" ON - ERICSSON REVIEW, ERICSSON. STOCKHOLM, SE, no. 3, 1998, pages 110-117, XP000783249 ISSN: 0014-0171	19	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04Q H04L
A	* the whole document *	1-23	

P,X	DE 100 16 622 A (SIEMENS AG) 18 October 2001 (2001-10-18) * paragraph [0001] - paragraph [0016] * * paragraph [0024] - paragraph [0026] * * paragraph [0038] * * paragraph [0043] - paragraph [0049] * * paragraph [0059] - paragraph [0060] * -----	1-9, 14-21	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 12 September 2003	Examiner Rüschmann, F
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document	

EPO FORM 1503 (02.02 (P04001))

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 25 2170

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-09-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9857444	A	17-12-1998	US 6134437 A	17-10-2000
			AU 746057 B2	11-04-2002
			AU 7811698 A	30-12-1998
			BR 9809741 A	11-07-2000
			CN 1267412 T	20-09-2000
			DE 69810467 D1	06-02-2003
			EP 0986865 A1	22-03-2000
			WO 9857444 A1	17-12-1998
WO 9839936	A	11-09-1998	AP 1131 A	11-12-2002
			AU 738746 B2	27-09-2001
			AU 6630798 A	22-09-1998
			BR 9808149 A	28-03-2000
			CN 1108047 B	07-05-2003
			EP 0965203 A2	22-12-1999
			WO 9839936 A2	11-09-1998
			HU 0000860 A2	28-08-2000
			JP 2001513968 T	04-09-2001
			NO 994198 A	27-10-1999
			NZ 337727 A	25-05-2001
			PL 335646 A1	08-05-2000
			US 6473617 B1	29-10-2002
			ZA 9801835 A	06-12-2001
DE 10016622	A	18-10-2001	DE 10016622 A1	18-10-2001

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



(11) **EP 1 392 023 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
16.06.2004 Bulletin 2004/25

(51) Int Cl.7: **H04L 12/28, H04L 12/56**

(43) Date of publication A2:
25.02.2004 Bulletin 2004/09

(21) Application number: **03254867.9**

(22) Date of filing: **05.08.2003**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR
Designated Extension States:
AL LT LV MK

- **Salokannel, Juha**
36240 Kangasala (FI)
- **Lappeteläinen, Antti**
02200 Espoo (FI)
- **Smolander, Visa Tapio**
90630 Oulu (FI)

(30) Priority: **20.08.2002 US 224768**

(71) Applicant: **Nokia Corporation**
02150 Espoo (FI)

(74) Representative: **Derry, Paul Stefan et al**
Venner, Shipley & Co,
20 Little Britain
London EC1A 7DH (GB)

(72) Inventors:
• **Reunamäki, Jukka**
33720 Tampere (FI)

(54) **Short range wireless communication**

(57) Systems and methods for a communication system implementing a short range communication link between devices advertising available information and services, and user devices which may initiate a request for further information or services. The communication system provides a low power solution utilizing an optimized combination of a carrier sensing and frequency division multiple access to avoid collisions. The optimization involves the use of a random mean zero value offset appended to the advertising devices' transmission frames. The offset increases the likelihood that a first

advertising device will recognize the transmissions of another advertiser's transmissions (i.e., determining that a channel is busy) and avoid unnecessary transmissions that will result in collisions. Upon recognition, the first advertiser may shift its transmission frame accordingly, thereby avoiding transmission collisions between advertisers. The communication system may be implemented in either a StandAlone LowRate system, or in a device with a pre-existing operational Bluetooth implementation.

EP 1 392 023 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 25 4867

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X,P	WO 02/073893 A (ALINIKULA PETTERI; HONKANEN MAURI (FI); HUOMO HEIKKI (FI); LEINONE) 19 September 2002 (2002-09-19) * page 11, line 29 - page 12, line 5 * * page 10, line 22 - page 11, line 10 * * page 9, line 30 - page 10, line 4 * * page 8, line 2 - page 9, line 17 * * page 1, lines 8-25 * -----	1-4,7, 9-12	H04L12/28 H04L12/56
X	EP 1 193 951 A (NOKIA CORP) 3 April 2002 (2002-04-03) * paragraphs [0003], [0004], [0007] - [0009], [0022] - [0025], [0040], [0045], [0049] * -----	1-12,20, 23	
A	EP 1 113 690 A (TOKYO SHIBAURA ELECTRIC CO) 4 July 2001 (2001-07-04) * column 5, lines 7-25 * * column 3, lines 19-23 * * column 1, lines 32-44 * * column 1, lines 1-9 * -----	1-12,20, 23	
A	US 5 870 388 A (LYE KIN MUN ET AL) 9 February 1999 (1999-02-09) * page 3, lines 45-51 * * column 2, line 13 - column 3, line 9 * * column 1, lines 1-35 * -----	1-12,20, 23	H04L H04Q
A	TRITTON J A: "Interactive home systems (IHS)-voice and data services" IEEE, 11 September 1988 (1988-09-11), pages 108-112, XP010071871 * page 111, right-hand column, lines 1-21 * * page 109, left-hand column, lines 9-28 * * page 108, left-hand column, lines 25-32 * * ----- -/--	1,20	

-The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 25 November 2003	Examiner Pasini, E
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document		T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document	

EPO FORM 1503 03.02 (P04Co1)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 25 4867

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 636 223 A (FRASER BUD ET AL) 3 June 1997 (1997-06-03) * column 2, line 37 - line 65 *	1-12,20,23	
A	NASIPURI A ET AL: "A multichannel CSMA MAC protocol for multihop wireless networks" WIRELESS COMMUNICATIONS AND NETWORKING CONFERENCE, 1999. WCNC. 1999 IEEE NEW ORLEANS, LA, USA 21-24 SEPT. 1999, PISCATAWAY, NJ, USA, IEEE, US, 21 September 1999 (1999-09-21), pages 1402-1406, XP010353705 ISBN: 0-7803-5668-3 * page 1403, left-hand column, line 56 - right-hand column, line 7 * * page 1402, right-hand column, lines 13-30 *	1-12,20,23	
A	LO F L ET AL: "Performance of multichannel CSMA networks" INFORMATION, COMMUNICATIONS AND SIGNAL PROCESSING, 1997. ICICS., PROCEEDINGS OF 1997 INTERNATIONAL CONFERENCE ON SINGAPORE 9-12 SEPT. 1997, NEW YORK, NY, USA, IEEE, US, 9 September 1997 (1997-09-09), pages 1045-1049, XP010263936 ISBN: 0-7803-3676-3 * paragraphs [0001] - [0003] *	8,10-12	
<p>The present search report has been drawn up for all claims</p>			
Place of search Munich		Date of completion of the search 25 November 2003	Examiner Pasini, E
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (02.02.92) (P40001)



European Patent
Office

Application Number

EP 03 25 4867

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☒ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:

1-12, 20,23



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number

EP 03 25 4867

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-12, 20,23

Short range wireless communication with transmission of
periodic advertisement messages based on the measurement of
an energy level on an initialisation channel.

2. claims: 13-19, 21,22

Short range wireless communication using an initialisation
channel and a unicast channel.

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 25 4867

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-11-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 02073893	A	19-09-2002	FI 20010484 A	10-09-2002
			EP 1366603 A1	03-12-2003
			WO 02073893 A1	19-09-2002
			US 2002193072 A1	19-12-2002

EP 1193951	A	03-04-2002	FI 20002160 A	30-03-2002
			EP 1193951 A2	03-04-2002
			US 2002039367 A1	04-04-2002

EP 1113690	A	04-07-2001	JP 2001189689 A	10-07-2001
			EP 1113690 A2	04-07-2001
			US 2001019956 A1	06-09-2001

US 5870388	A	09-02-1999	SG 42760 A1	17-10-1997
			GB 2303768 A ,B	26-02-1997

US 5636223	A	03-06-1997	CN 1142734 A ,B	12-02-1997

EPO FORM 6504

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



(11) **EP 1 246 487 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.10.2002 Bulletin 2002/40

(51) Int Cl.7: **H04Q 7/36**

(21) Application number: **02252170.2**

(22) Date of filing: **26.03.2002**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
 Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
 • **Flitton, Michael Phillip**
Bristol BS1 4ND (GB)
 • **Lewis, Jonathan David**
Bristol BS1 4ND (GB)

(30) Priority: **30.03.2001 GB 0108025**


(74) Representative: **Midgley, Jonathan Lee**
Marks & Clerk
57-60 Lincoln's Inn Fields
GB-London WC2A 3LS (GB)

(71) Applicant: **Kabushiki Kaisha Toshiba**
Tokyo 105-8001 (JP)

(54) **Mode monitoring and identification through distributed radio**

(57) Independent radio communication devices can share network information directly with each other in the local area using an independent wireless link. This network information encompasses synchronisation information, interference, network configuration, neighbour

cell list, paging requests, etc., and can be relevant to multiple networks, frequency carriers and/or air interface modes. Sharing the information reduces the processing requirement, the power consumption, and the bandwidth consumption of devices.

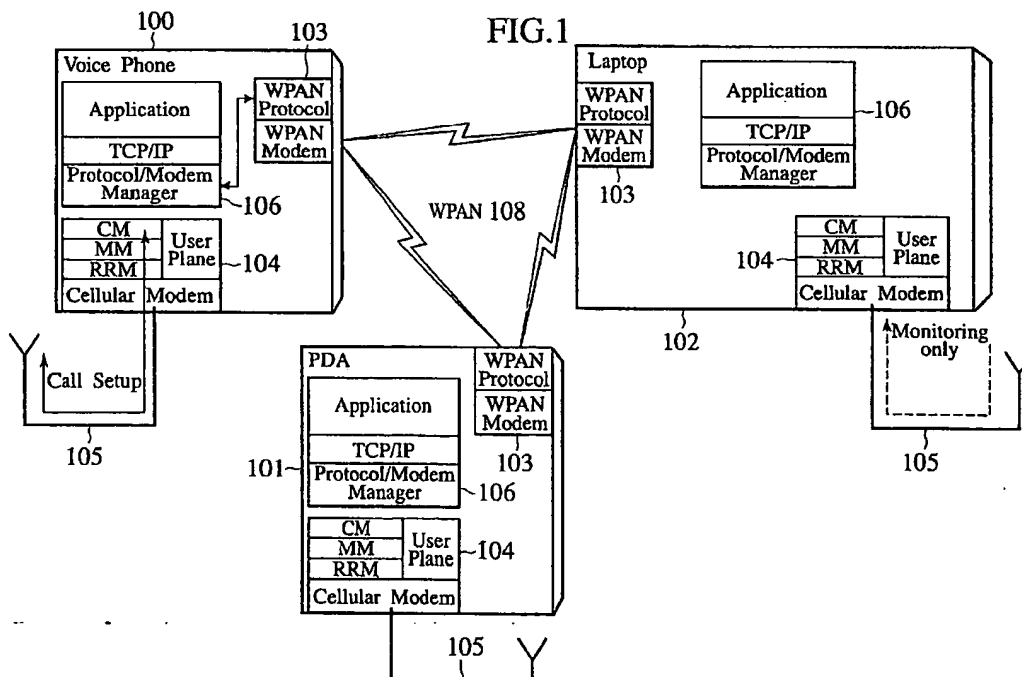

Description

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

[0001] The present invention relates to a method of sharing resources between devices using wireless connectivity, and in particular to the sharing of a radio link to a remote base station or access point between several devices located within a small geographical area.

DESCRIPTION OF THE RELATED ART

[0002] A mobile phone network comprises a series of base stations covering a range of geographical areas, and a multiple of handsets. Each handset communicates with one of the base stations, and the particular base station used is selected depending on factors such as geographical location, interference, channel loading, etc.

[0003] However, an increasing problem with this arrangement is that the number of people using mobile phones is increasing rapidly, and there is only a limited amount of bandwidth available for transmission of signals to and from individual handsets. Radio links from laptop computers, personal organisers, etc., are also becoming much more common, for example, to connect to the internet (e.g. WAP), for fax, video conferencing, telematics, or for remote control of hardware devices such as domestic appliances in the home.

[0004] The traditional approach to this problem of limited bandwidth has been to introduce more and more complex methods of scheduling. Air interface modes such as TDMA (time-division multiple access), e.g. GSM (Global System for Mobile communications), are based on dividing time into slots and placing the signals of different users into different time slots. Another way of using the available bandwidth, which may be more efficient, is CDMA (code division multiple access), in which signals from multiple users are sent at the same time in the same frequency band, with the spectrum of each user's signal spread through the bandwidth of the frequency band according to a code sequence unique to the user. One of the most important implementations of CDMA is W-CDMA (wideband CDMA), which uses a 5 MHz carrier, allowing the possibility of multimedia transmission such as video streams.

[0005] In the earlier implementation of CDMA, blind interfrequency handover could result in inadequate call quality. Instead, a mobile radio had to be able to monitor the signal strength and quality of another carrier frequency while still maintaining the connection in the current carrier frequency. In the case of W-CDMA, this need can be overcome by having the system enter *compressed mode* to simultaneously monitor other carriers. In compressed mode, the system is manipulated to provide a number of contiguous slots free for measuring

other channels. However, compressed mode requires a highly complex level of network management. A variety of methods can be used to establish compressed mode, for example through reduced spreading factor (perhaps with increased transmit power), increased puncturing, or higher layer signalling. In each case, the mobile terminal will suffer as the raw throughput of the channel is being reduced. In the case of reduced spreading factor, the receiver may experience greater interference (and create greater interference, if a higher base station transmit power is used). With puncturing, the error detection/correction properties of any coding may be impaired. Finally, with higher layer signalling, certain segments of data must be scheduled to not be transmitted which may degrade overall perceived quality.

[0006] In general, a mobile device may have to spend a significant amount of time monitoring: other carriers, base stations; access points within the same radio mode; or carriers, base stations or access points which are attached to another mode. This monitoring time may impact on the throughput (as observed by the user), power consumption, and the latency which is introduced before a handover to an alternative carrier, base station, access point, or mode.

[0007] In addition to the user of more complex air interface modes, wireless devices themselves are becoming increasingly complex, as a larger and larger set of radio functionality and applications are required. The trend has been towards integrating all the required technology in a single device, to allow the user flexibility of operation. This desire of highly complex functionality, flexibility and multiple air interface modes leads towards the "Software Defined Radio" concept where a flexible architecture is employed to fulfil all requirements.

[0008] In recent times it has also become feasible to provide an independent low power interconnection between devices through the use of a Wireless Personal Area Network (WPAN), such as a Bluetooth enabled WPAN. Within WPAN equipped devices, this mode of operation is likely to exist in addition to (and independently of) other capabilities, such as: cellular or Wireless Local Area Network (WLAN) transceivers; significant processing power; and other features. The provision of this independent link gives the potential for a device to utilise the resources of other devices that are attached with the wireless interconnection. This concept of a virtual device that is formed from a number of separate wireless units is described here as a *distributed wireless system of distributed radio*.

[0009] The separate wireless units are likely to be manufactured independently and even independently owned, but are linked through a preferably common short-range wireless link with a common communications protocol. It would also be possible to use more than one type of link within the WPAN, although there may then be more problems with the upper layers in terms of forwarding information over multiple link types.

[0010] A further problem with mobile radio device is

that they tend to be battery operated, but the radio links to the base station must be of reasonably high power. This is a major factor in draining the batteries, and reducing the amount of time before recharging is necessary.

BRIEF SUMMARY OF THE INVENTION

[0011] According to the present invention there is provided a communication device comprising: first communication means for communicating with a base station or access point over a first network; and second communication means for communicating with one or more other communication devices over a second network, said other communication devices being able to communicate over said first network, wherein said communication device is adapted to send and/or receive network information of the first network over said second network.

[0012] The present invention uses the concept of distributed radio to reduce the problems of the limited available bandwidth on the radio network, the large amounts of processing required for scheduling and monitoring, and the battery drain resulting from high power radio transmissions. Resources are shared between devices using local low power wireless connectivity. Preferably, the distributed radio concept is utilised to support efficient monitoring of network information on one or more radio networks.

[0013] It is through exploiting the local wireless link that the novel aspects of this invention are achieved. Networking information available on a device is exploited by another device. It should be noted that the distributed radio concept applies equally to a large number of interconnected devices or to a limited number.

[0014] With the present invention, the network information (network monitoring information) that is available to one radio communication device is shared with other radio device(s) within a small geographical area. Provided this area is reasonably small and homogeneous, the network monitoring information will be valid across the entire distributed radio. Shared network information can include synchronisation information, interference, quality of service, network configuration, neighbour cell list, paging requests, etc. and can be relevant to multiple networks, frequency carriers and/or air interface modes.

[0015] Sharing of available network information can reduce the battery consumption of the devices and time taken to perform monitoring within the distributed radio. Furthermore, it may reduce the requirements for network management. For example, in the case of W-CDMA, monitoring through a distributed radio may remove the need to enter compressed mode.

[0016] The WPAN could include any mechanism for providing a wireless link between devices, such as the use of Short Range Devices (SRDs), Infrared connections, and industry standards such as Bluetooth. The WPAN system is preferably able to operate concurrently

with the radio communication system within all devices.

[0017] Depending on the exact WPAN used, different types of WPAN network configurations may be used. For example, a network in which each device can communicate directly with every other device, or a network in which information can be forwarded between those devices which do not have direct links. The exact topology is more likely to be influenced by the format of the WPAN short range link itself. For example, Bluetooth uses a master-slave arrangement, and it would be reasonable for the Bluetooth master to act as the radio network monitoring device, and be able to forward on information such as paging requests. Alternatively, it is possible to configure a slave to be the monitoring device, in which case the monitoring information is forwarded to the master, and then forwarded on by the master to other slaves. A WPAN network topology in which devices forward information which is not intended for them could provide enhanced coverage within a certain area. However, it would be important to ensure the quality of the measurement for all devices. The forwarding devices may not themselves be interested in the measurement reports (or indeed be equipped with that radio mode).

[0018] The bandwidth of the WPAN link could either be small, only allowing the relaying of essential control signals, or it could be much larger, allowing full data relaying. A distributed radio according to the present invention could then also provide backup means for any individual radio device within it, switching to another radio transmitter in the case of the radio link to that device breaking down, e.g. due to transmitter failure, low battery, localised interference, etc.

[0019] The system may associate some form of reliability indicator with the network monitoring information. This could take the form of a measure of similarity of the radio environment as seen by the client device (receiving information from the monitoring device) and monitoring devices (which monitor the network to provide information to the clients), such as the path loss between the devices. This would give an indication of the homogeneity of the radio environment which encompasses the distributed radio. Alternatively, the client device could obtain network information from the monitoring device whilst the client device itself is still monitoring. By comparing the two sets of information, the reliability of the monitoring devices measurement reports will be established. Once the veracity of the information is established, the client device can then leave the required functionality to the monitoring device. The client device may periodically enter monitoring mode to check the reliability of the monitoring device's reports.

[0020] Devices may indicate their relative (or absolute) positions to each other and/or the serving network, in order to establish the validity of network information derived from another device within the distributed radio. Network information may be time-stamped to indicate when the measurement was taken. This allows the validity of the information to be established.

[0021] A device may enter low power mode, in which the radio network is not being monitored by that device. Instead, a designated monitoring device will forward any paging requests to the desired device via the WPAN link.

[0022] The radio network monitoring device may initiate response to the radio network on behalf of the client device. This could occur in response to a paging message. The monitoring device would respond to the radio network with the appropriate message, allowing the client device more time to obtain resynchronisation.

[0023] In the case where two devices in the WPAN are connected to different radio networks, and the first device wishes to switch over to the network of the second device, the second device initiates a connection or handover request to its radio network on behalf of the first device. If the second device sets up the connection for the first device in this way, it can then relay information to the first device to confirm that sufficient capacity is available. When handing over between modes, using handover in this way removes the need for a device to retune and start the other mode to check network loading, availability, etc.

[0024] The actual choice of which device is picked to be the monitor may be dependent on a number of factors. For example, on whether the device has mains power, and if not, then on the remaining battery power; on whether the device is already connected and active; on which device has the most similar radio link to all other devices (which may imply in the geographic centre of the distributed radio); on radio performance (the monitoring device should have an equal or better sensitivity as compared to other devices); or on user preference. Where the decision is made is a complex question, and partly will depend on the topology of the underlying WPAN. A centralised, master controlled network may use the master to determine which device should be the monitor (which may or may not be itself). However, a centralised architecture could still use some form of distributed decision making regarding which device should be the master. Similarly, a decentralised topology may adopt a centralised or decentralised structure for choosing the monitor. In general, it seems that a centralised choice of the monitoring device would be easier to implement, as one device can collate capabilities before making the choice.

[0025] Devices within the distributed radio may exchange information about multiple networks, frequency carriers and/or air interface modes. This information encompasses synchronisation information, loading level, network configuration, neighbour cell list, etc. These factors can be used to determine whether to handover to another network, frequency carrier and/or air interface mode.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] Preferred embodiments of the present invention are now described, with reference to the accompa-

nying drawings, in which:

Figure 1 shows a first embodiment of the invention, in which the devices within the distributed radio are all connected in the same mode;

Figure 2 shows a flow chart summarising the steps taken by the distributed radio in the first embodiment of the invention;

Figure 3 shows a second embodiment of the invention, in which the devices within the distributed radio are connected in different modes; and

Figure 4 shows a flow chart summarising the steps taken by the distributed radio in the second embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0027] Two embodiments of the present invention will now be described. In the first embodiment, the devices within the distributed radio are all connected in the same mode (e.g. all GSM). In the second embodiment, the devices are connected in different modes (e.g. some in GSM and some in W-CDMA).

[0028] In a first embodiment of the invention, illustrated in figure 1, all devices within the distributed radio are connected to a radio network in the same mode. One device monitors the network and shares relevant network information with other devices within the distributed wireless system. This information could include (but is not limited to) paging messages, synchronisation, neighbour cell (or access point) monitoring.

[0029] In this embodiment, sharing of network monitoring information reduces power consumption for the devices that are not currently active. This may allow user devices to enter a low power mode, where no communication with the network occurs directly, and instead, network information is routed via the low-power WPAN link.

[0030] This can also be exploited to reduce requirements on the network. For example, a terminal operating in W-CDMA in dedicated mode may require the use of compressed mode to monitor other W-CDMA carriers (allowing the terminal to handover to them). This needs additional computation within the terminal and requires the network to schedule compressed mode operation. Here, this information can be obtained from another terminal connected within the distributed radio, reducing power consumption and network requirements.

[0031] In figure 1, three radio devices are shown, linked by a WPAN 108 - a voice phone 100, a PDA 101, and a laptop computer 102. Each device comprises a WPAN module 103, a radio network module 104, and a radio antenna 105. The radio network module 104 includes means for connection management (CM), mobility management (MM) and radio resource management (RRM). Each device initiates registration on the radio network, either directly or by one device registering all other devices. Each device should now be camped on,

i.e. ready to make a call. The protocol managers 106 of the devices then make a collective decision about what the optimum monitoring configuration should be. In the example shown, it is decided that the laptop 102 should do all the monitoring. The laptop 102 now listens for all paging messages for all devices within the distributed radio. When the radio environment changes (e.g. more base stations become visible) or when updated cell information becomes available, this information is passed to the remaining devices via the WPAN link 108. When an incoming paging request is received for the phone 100, details and timing information is passed to the phone 100 via the WPAN link 108. The phone 100 accepts the paging request and using timing information from the laptop 102, synchronises to the network and initiates random access and call set-up via its own modem in the radio network module 104. An alternative would be for the laptop 102 to issue the random access request on behalf of the phone 100, whilst the phone 100 is synchronising. The phone 100 now enters connected mode. Due to the new configuration (the phone 100 is now connected), it may be necessary to update the designated monitoring device. If devices leave (or enter) the distributed radio, it may be necessary to reconfigure and reassign the role of monitoring device. Alternatively, if the environment changes (e.g. the monitoring device moves away from the other devices) it may be necessary to reconfigure.

[0032] The steps taken by the distributed radio in this first embodiment are summarised in the flow chart shown in figure 2.

[0033] A second embodiment of the invention is shown in figure 3, in which different air interface modes are used within the distributed wireless system. In this case, information can be obtained through the distributed radio to facilitate mode handover. Unlike the previous example, it is more likely that the information exchange will be a one-off event (preceding inter-mode handover, for example) rather than a continuous series of events. Again, the user does not need to derive the information of other modes directly (e.g. GSM monitoring during compressed mode in W-CDMA). Instead, devices within the distributed radio which are connected using different air interface modes share information on the current serving base station, neighbour cell lists for that mode/network, etc. It may be necessary for there to be some degree of location awareness within the devices, as it can only be assumed that all devices within the distributed radio can connect to the same mode/network if they are relatively close. This location awareness could be limited to a simple indication of range between monitoring and recipient devices; if this range is below a certain threshold, then the information is assumed to be valid and can be applied. A very simple measure of range would assume that if all the devices are connected, and the transmit power is sufficiently low, then the geographical extent of the WPAN network will be small. A more complex method is to use location equipped devices

(with e.g. GPS) and exchange this information as part of the information exchange. However, range will not necessarily give the best view of homogeneity from the radio access point of view. For example, with two devices which are very close (and therefore have a good WPAN link), one may be obscured from the base station by a building corner, while the other is not. Generally, a more reliable technique may be the parallel measurement method, where the recipient device does a similar measurement to the monitoring device, to ensure the validity of the link. It may be possible to determine the relative homogeneity of the WPAN network by a simple examination of a received signal strength indicator (RSSI) coupled with knowledge of antenna gains and transmitted power. It is desirable not only to measure the similarity of the radio environments, but also the similarity of their rates of change. This could be extended to say that a variable time threshold could be set for retesting similarity. If, for example, the environments are similar and not changing then the devices can share information for a long time before rechecking the environment. If the radio environment is rapidly changing then the time period may have to be shortened.

[0034] In figure 3, two radio devices 113, 114 are illustrated. One of these is connected in GSM mode to a GSM base station 109 via a GSM link 111, whilst the other is in W-CDMA mode connected to a W-CDMA base station 110 via a W-CDMA link 112. The W-CDMA device 114 is a dual mode terminal, also capable of operation in GSM mode, and in the example shown is in a state when handover to GSM is desirable (e.g. poor coverage for W-CDMA in this region). The relevant information regarding whether to hand over to GSM, whether connection is permitted by the operator, appropriate base stations, channel configuration, etc. is obtained directly from the GSM device 113. Since the GSM device 113 is already connected in this mode, and to the relevant network, no additional monitoring is required. The overheads required for this operation are the power consumed by the WPAN system to forward on the relevant network information.

[0035] In this second embodiment, the dual mode device 114 issues a paging request (and e.g. associated service discovery protocol) to establish if any WPAN-equipped devices in the vicinity have network information that it requires. Another device can then respond if it has the relevant information. This response may indicate details of the available information (network type and operator, etc.). The dual mode device 114 selects one or more monitoring devices from those who have responded to the request (in this case from the GSM device 113), and elicits the required information. The particular device(s) chosen to provide network information depends on a number of factors, for example on whether a relevant network type and operator is supported, and on the relative range. The selected monitoring devices forward the desired information to the recipient device. Thus in figure 2, the GSM device 113 pro-

vides GSM network information for the dual mode device 114. Thus the entire exchange of information on network capability and of network information is performed via the WPAN link, and may occur simultaneously with established dedicated link(s) in the connected device(s).

[0036] The steps taken by the distributed radio in this second embodiment are summarised in the flow chart shown in figure 4.

[0037] Thus, the present invention provides a system for reducing the bandwidth required for portable devices to communicate with a base station over a radio network. In addition, by avoiding power hungry communications with a distant base station of a network, the battery consumption of portable radio devices can be considerably reduced. The invention also allows a reduction in the computational requirements of a portable radio device for scheduling and monitoring, in particular, potentially eliminating the need to use compressed mode W-CDMA. The system additionally provides a method of error checking and/or error correction by comparing the radio signals received on the same channel by more than one radio device as well as providing a method of checking the quality and uniformity of the radio environment by comparing the radio signals received on the same channel by more than one radio device.

Claims

1. A communication device comprising:

first communication means for communicating with a base station or access point over a first network; and
second communication means for communicating with one or more other communication devices over a second network, said other communication devices being able to communicate over said first network, wherein said communication device is adapted to send and/or receive network information of the first network over said second network.

2. A communication device as claimed in claim 1, wherein said first communication means can operate concurrently with said second communication means.
3. A communication device as claimed in claim 1 or 2, wherein said second network operates using one of: Wireless Personal Area Network; Short Range Device, infrared connections; or Bluetooth.
4. A communication device as claimed in any one of the preceding claims, wherein the network information includes network monitoring information which has been derived from the first network of a partic-

ular device.

5. A communication device as claimed in any one of the preceding claims, wherein said network information includes information about a single network, frequency carrier and/or air interface mode.
6. A communication device as claimed in any one of claims 1 to 4, wherein said network information includes information about multiple networks, frequency carriers and/or air interface modes.
7. A communication device as claimed in claim 6, wherein said network information is used to determine whether or not to hand over to another network, frequency and/or mode.
8. A communication device as claimed in any one of the preceding claims, wherein said first communication means can enter a mode in which communication over the first network is suspended.
9. A communication device as claimed in any one of the preceding claims, wherein said network information includes information on alternative W-CDMA carriers.
10. A communication device as claimed in any one of the preceding claims, wherein network information on the same channel is received from more than one other communication device and the results are compared to determine the reliability of some or all of the other communication devices.
11. A communication device as claimed in any one of the preceding claims, further adapted to receive a measure of the reception quality of the first network as seen by one or more of said other communication devices and monitoring the similarity to determine an indication of the homogeneity of the environment which encompasses the devices in the second network.
12. A communication device as claimed in any one of the preceding claims, further adapted to send and/or receive information of their relative or absolute positions relative to another communication device and/or the serving network, in order to determine the validity of network information derived from another communication device within the second network.
13. A communication device as claimed in any one of the preceding claims, wherein said network information is time-stamped to indicate when the measurement was taken.
14. A communication device as claimed in any one of

the preceding claims, further adapted to initiate a response to the first network on behalf of another communication device via the second network.

15. A communication device as claimed in any one of the preceding claims, wherein the first network is a radio network. 5
16. A communication device as claimed in any one of the preceding claims, wherein the second network is a radio network. 10
17. A distributed radio system, comprising a plurality of communication devices as claimed in any one of the preceding claims, each of said communication devices being linked via said second network. 15
18. A radio network base station which is adapted to communicate with a first communication device via a second communication device using a local wireless link, wherein said first and second communication devices are in accordance with any one of claims 1-16. 20
19. A method of communicating network information on a first network within a distributed radio, comprising the steps of 25
 - setting up the distributed radio by establishing a local wireless link between a plurality of devices;
 - nominating one of said devices as a first network monitoring device; and 30
 - communicating network information to some or all of the remaining devices by means of the monitoring device and the local wireless link. 35
20. A method for preservation of bandwidth used by a plurality of radio devices connected to a radio network, comprising the steps of 40
 - establishing a local independent wireless link between said radio devices;
 - nominating one of said radio devices as a monitoring device;
 - switching off radio links to said radio network of some or all of the other radio devices; and 45
 - communicating information received from a base station of said radio network to one or more of said other radio devices by means of the monitoring device and the local independent wireless link.
21. A method of allowing a radio device to monitor a signal on more than one channel or mode, when said radio device is in close proximity to a plurality of other radio devices, comprising the steps of 50
 - establishing a local independent wireless link between said radio devices; 55
 - setting said radio devices to monitor on different modes or channels;
 - exchanging information obtained by different

devices on the local independent wireless link.

22. A method of reducing processing requirements for generating an air interface mode radio transmission, by using a distributed radio to simultaneously monitor the current carrier frequency and a proposed new carrier frequency.
23. A method of facilitating W-CDMA interfrequency handover by using a distributed radio to simultaneously monitor the current carrier frequency and a proposed new carrier frequency.

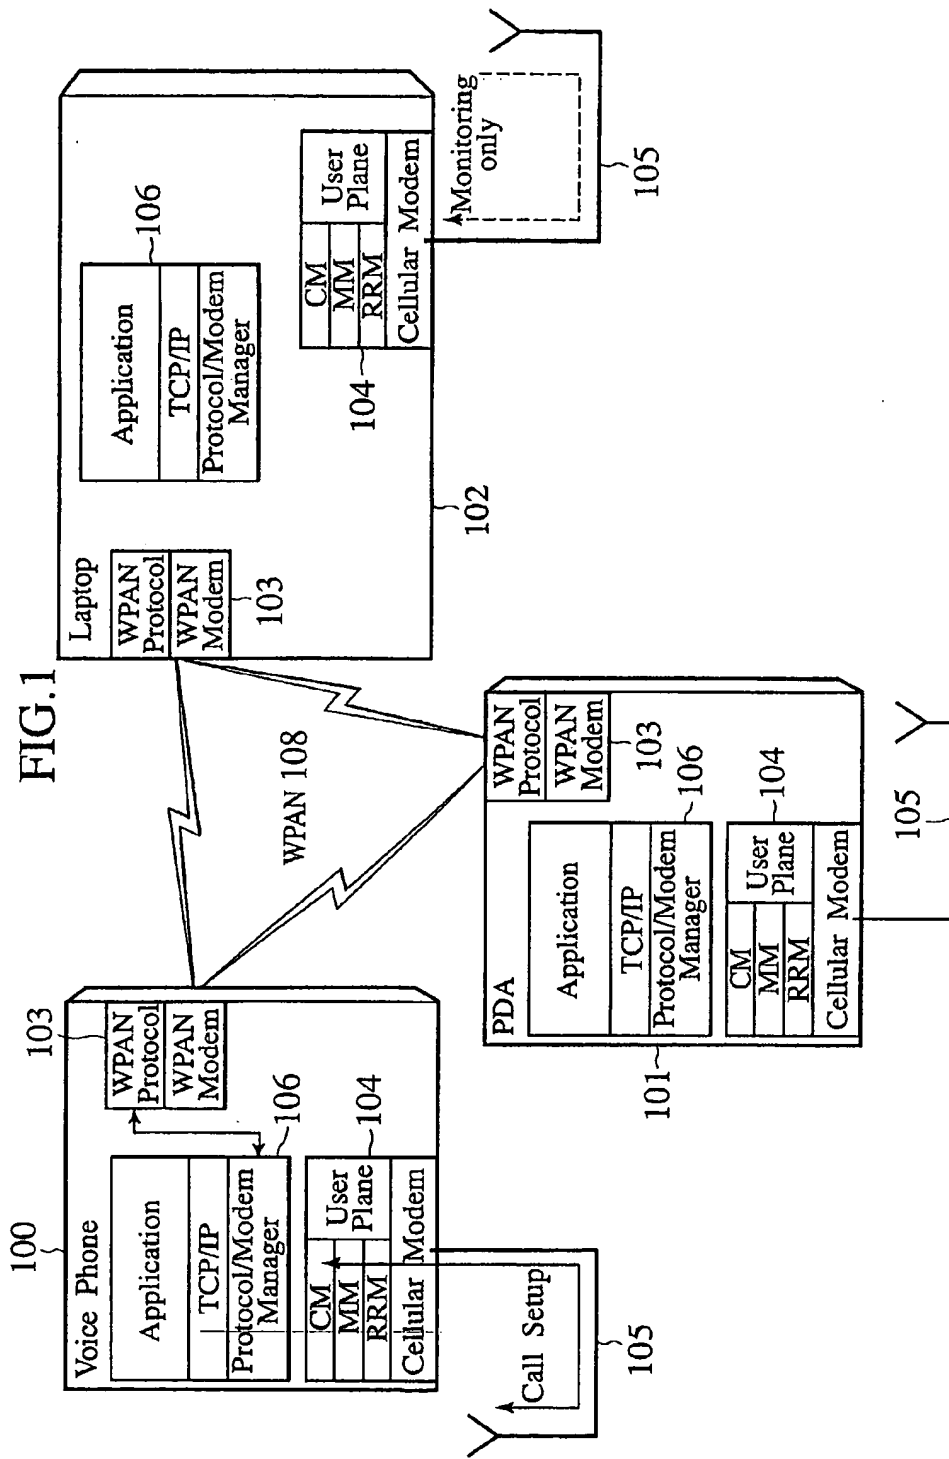


FIG.2

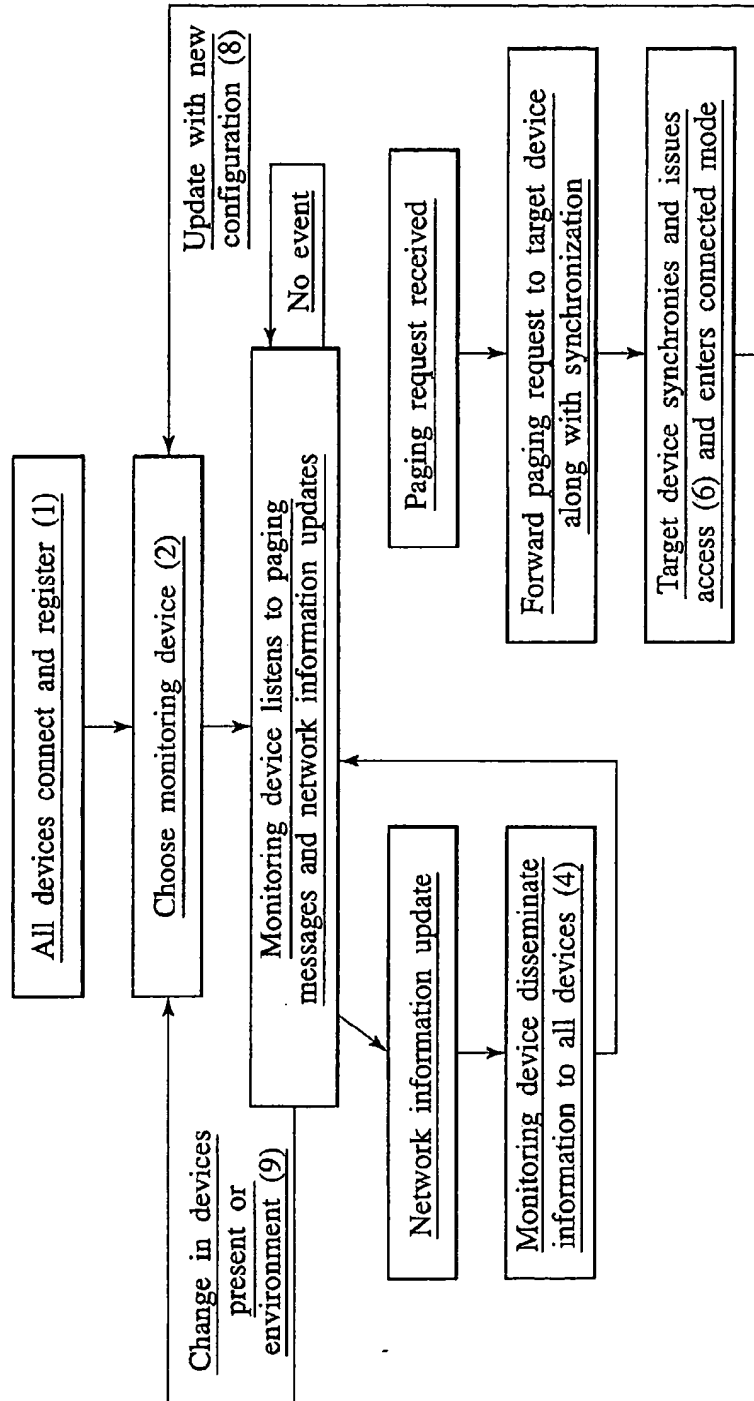


FIG. 3

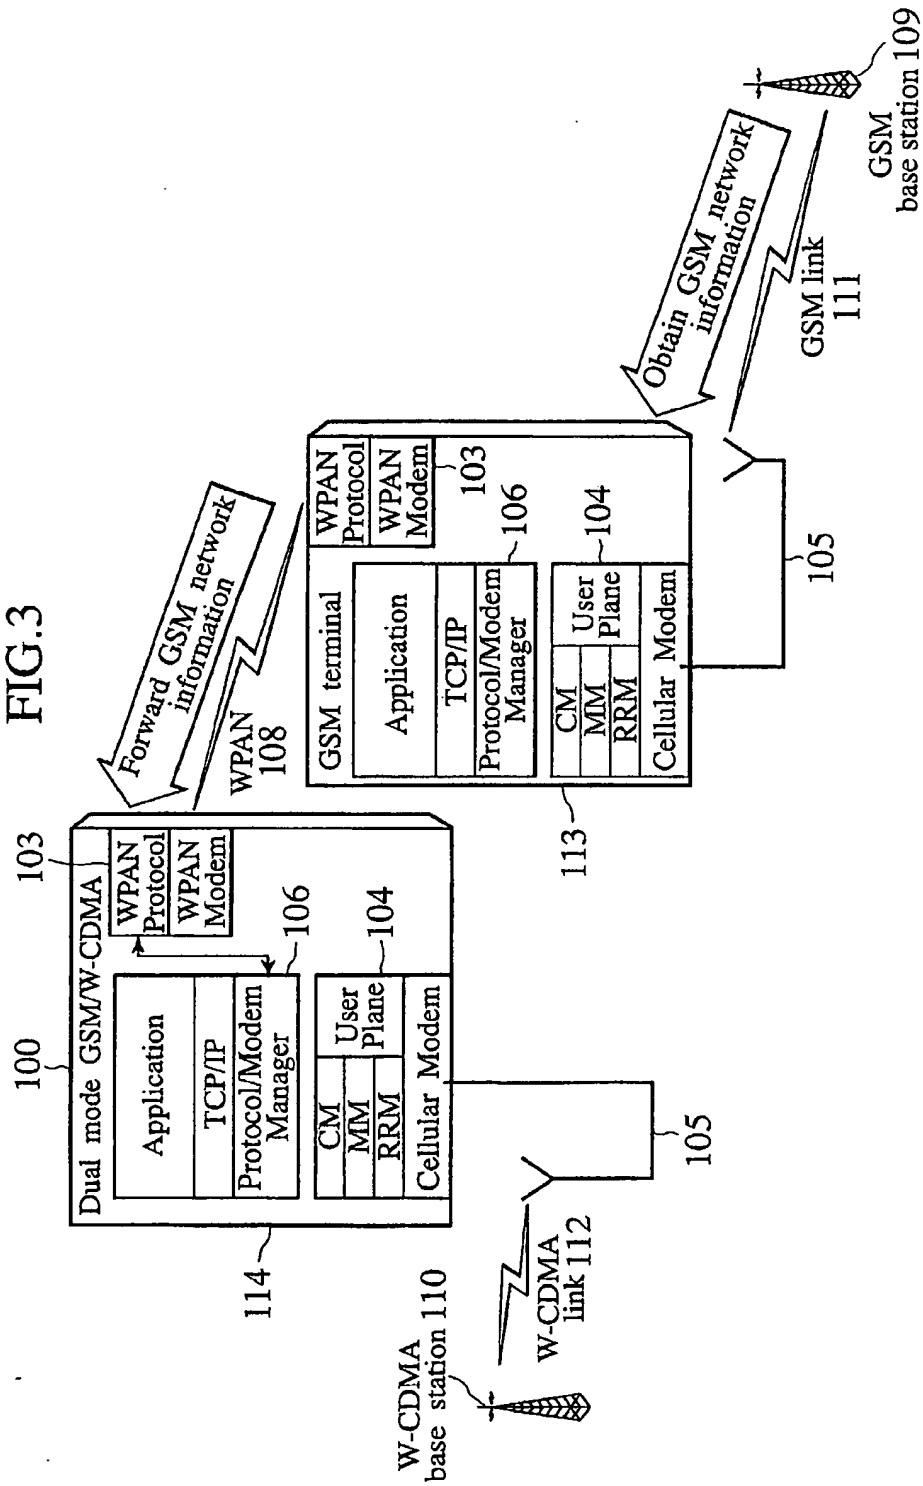


FIG.4

